

xAffect – A Modular Framework for Online Affect Recognition and Biofeedback Applications

Kristina Schaaff, Lars Müller, Malte Kirst, and Stephan Heuer

FZI Forschungszentrum Informatik, Karlsruhe, Germany,
[schaaff,lmueLLer,kirst,heuer]@fzi.de

Abstract. Providing information about the affective state of a person is getting more and more important in a wide range of learning applications. For instance biofeedback can be used to reduce stress level or increase the performance of a person during a learning task. The development of wearable physiological sensors drives the development of applications that provide online biofeedback using sensor data for online analysis. In this paper we present a Java software framework called xAffect for complex online biofeedback systems that can be used as a rapid prototyping middleware between physiological sensors and third party software. We designed xAffect for financial decision making support, but due to its easy extensibility it is a useful framework for several other affective computing applications. Biomedical engineers and computer scientists are invited to use xAffect and extend it according to their requirements.

1 Introduction

The affective state plays an important role for learning. It does not only influence well-being but also our decision making [10]. The knowledge of a person's affective state can help individuals to gain better self-awareness and improve self emotion regulation. Since the term 'affective computing' has first been defined as 'computing that relates to, arises from, or deliberately influences emotions' [11], a lot of affective applications have evolved. For instance, information about the affective state of a person can be used to make tutoring systems more human-like [3] and therefore can help to increase user acceptance of the system. Moreover, learning environments can be improved by using affective information, e. g. the content of the learning environment can be presented according to the current affective state of a person. Serious Gaming is another area where information about the affective state of a player can be used to enhance game-play.

However, it is hard to objectively measure the affective state of a person. For instance questionnaires can only provide a snapshot at a certain time and often lack of objectivity. Therefore, physiological monitoring solutions can be used in order to provide online feedback to a user as the affective state is strongly correlated with the physiological state of a person [2].

The development of applications that use online biofeedback in order to create affective applications is mainly driven by the fact that recently physiological monitoring solutions are getting increasingly unobtrusive and cheap.

Developing a system which provides online feedback about the affective state of a person often involves testing a large number of combinations of different sensors or algorithms. Designing a biofeedback system as a rapid prototyping solution can therefore help to minimize the effort for the design of such a system and to maximize reusability of single system components.

2 State of the art

Few learning applications already use physiological signals to capture affective aspects, e.g. AutoTutor [3]. However, various commercial products as well as non-commercial or open source projects for monitoring and analysis of certain physiological signals are available. Nevertheless, a closer look at these technologies reveals different drawbacks that a developer has to deal with. Most commercial systems are closed source solutions which do not allow modifications. Furthermore, they do not provide an interface for custom data access and analysis. While the software might provide sufficient analysis functionality for a certain biofeedback application, the choice of sensors coming with this software is often limited (e.g. with regard to sampling rate, number of available channels or parameters) and cannot be extended. Moreover, the documentation about the measuring methods and algorithms used for the data analysis often remains unclear, which introduces uncertainty into the interpretation of measurement results. Restrictive license terms and conditions concerning the rights to publish results and the ownership of acquired data may further constrain the usability of experiment outputs.

There exist several open source frameworks for design of multimodal and / or biofeedback applications. However, most of these frameworks are either designed for affective applications such as biofeedback or for multimodal input but not both at the same time. For instance, solutions like the widely-used BCI2000 software [12] focus mainly on brain computer interfaces and do not provide algorithms for online feedback of other physiological data than EEG. Other solutions like ICARE [1], CrossWeaver [14] or ICON [4] are mainly designed for development of multimodal systems but lack of platform independency. OpenInterface [8] is another powerful platform which was designed for rapid prototyping of multimodal systems. However, it is focussed on multimodal interaction design in general but does not contain components for biofeedback applications.

3 Example Scenario: Biofeedback in Trading Decisions

The affective state of a person has a large influence on how decisions are made in financial markets. In a study with 80 day-traders, [9] found, that traders with more intense emotional reactions to monetary losses or gains showed worse trading performance than traders with less intense emotional reactions. Moreover, [5] showed, that persons in a positive affective state tend to make more flexible decisions. Negative affect, on the other hand, determines more rational decision making. Helping traders to become aware of their current emotional state and to

regulate their emotions according to the market situation can help to improve decision making at financial markets. Figure 1 shows how biofeedback can be used to support the trader during the trading day. Physiological signals (e. g. heart rate or electrodermal activity) are used to compute the current affective state of a trader. This information is combined with data from the trading platform about the market situation and the trader’s decisions. Subsequently, a feedback is provided to the trader in which way to regulate his or her emotions to adapt to the market situation.

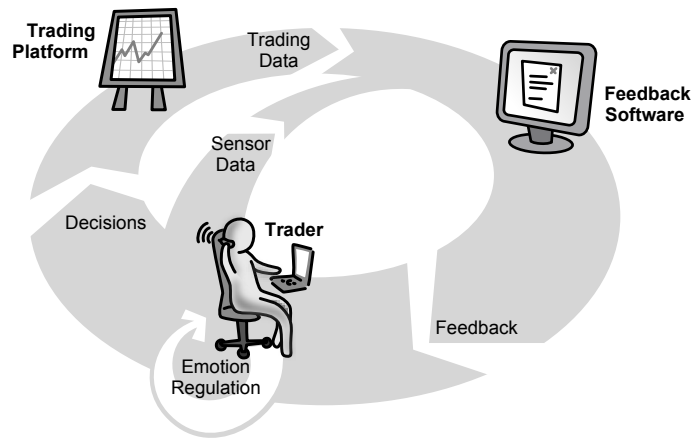


Fig. 1. Usage of biofeedback during trading

Developing and testing such a scenario as described above generates various requirements for an affective monitoring framework in terms of hardware and software. The basic requirements are:

- Allow connection to different unobtrusive physiological sensors (e. g. ECG, EDA, respiration) according to the specific application (off-the-shelf or custom devices).
- Online processing of acquired data to enable real-time feature extraction and classification in order to provide information about the affective state of the user.
- Easy integration of new or improved algorithms.
- Possibility to integrate additional information sources (e. g. a trading platform) and to receive control commands (e. g. to start or stop sensors) from higher level systems.
- Logging of raw data and derived data from any processing step for further offline analysis or just for logging purposes.

As a consequence, there was a need for a software framework for online affect recognition that can act as a middleware between physiological sensors and 3rd party software and meets the requirements for reconfigurability and extensibility.

4 The xAffect Framework

xAffect is implemented as a modular Java framework to fulfill the requirements outlined above. Our concept of modularizing the system into reconfigurable components that can be easily reused is described in the following section along with the major architectural decisions.

4.1 Concept

Systems for psychophysiological data analysis can be decomposed into three basic functionalities which are described by using a simple biofeedback application that visualizes the arousal level based on an ECG signal. First, data has to be received from a source, in this case an ECG sensor. Subsequently, an algorithm processes the data and creates a result such as the arousal level. The last step is to visualize the result to the user of the system. In more complex use cases, like presented in section 3, multiple sensors and algorithms are combined to create visualization and store the data for later analysis.

These combinations result in four basic patterns depicted in Figure 2: (a) chaining, (b) parallel processing, (c) data fusion and (d) distributed processing. In the following, these patterns are described as each of them results in specific requirements towards a modular framework for psychophysiological data analysis.

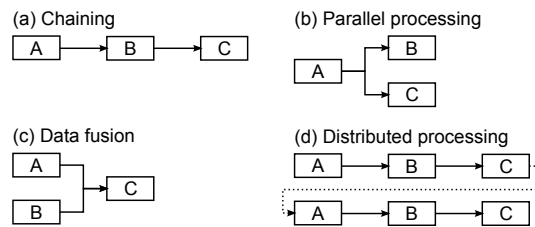


Fig. 2. Basic patterns for online data analysis

The most basic setup (a) consists of a linear concatenation of components; the output of one component is the input for the next one. Chains of components can be built that conduct data processing in a sequential manner. When modules along these chains are reused or replaced by other components, the interfaces between components have to be standardized. These interfaces combine two aspects: (i) control interfaces (e. g. how to configure or start a module) and (ii) data interfaces (e. g. how to encode multi channel data).

A second common pattern is the parallel processing (b) of data from one single data source or one data processor. It allows to speed up processing as well as comparing two processing approaches in near real-time. This requires that

each component is implemented as a single thread or process which has to be managed by the system.

Data fusion (c) is the major challenge for multimodal systems that combine multiple data sources. A data fusion component has to deal with multiple inputs that are often unsynchronized due to hardware specific transmission rates and network delays, e.g. when sensors are connected by bluetooth.

Distributed processing (d) of data across multiple platforms is becoming more important for mobile and cloud based applications. The requirements are varying between high bandwidth transmission of raw data and low bandwidth connections to multiple recipients of calculated features.

4.2 Architecture

The overall architecture of the framework is illustrated in Fig. 3. xAffect breaks down the whole signal processing chain into a set of interchangeable *Components*. These can be classified into three categories:

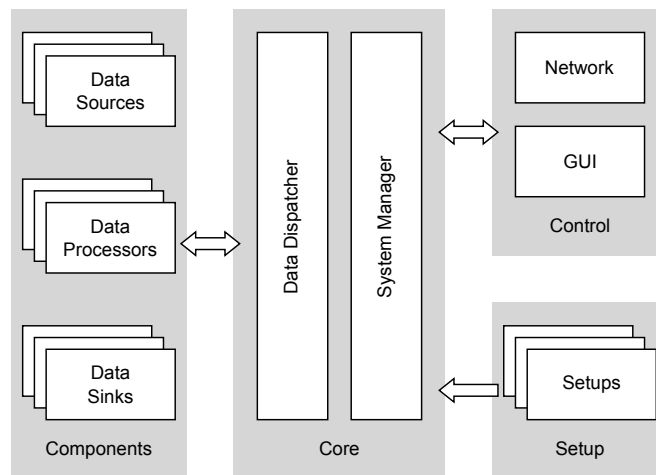


Fig. 3. Overall architecture and control flow of the xAffect framework

Data sources reflect all sensors, signal generators or timers that feed new data into the system.

Data processors are responsible for the processing of incoming data. These include simple data converters as well as complex signal processing algorithms.

Data sinks are responsible for data logging or data transmission. This does not only include streaming and storing data but also live visualization of the data and the computed features.

Each component provides automatically multiple outputs. Additionally, they can be configured for multiple inputs. The components can be flexibly combined

that users can easily create new systems or experiment with different algorithms reusing components from other settings. As the whole framework is designed to process data online, each component is running in an independent thread to enable parallel computation of features whenever possible.

The system configuration is defined in an application specific *Setup*, which specifies the correct order of all required components and their individual configuration parameters. xAffect's *Core* includes the basic functionality of initialization, the data dispatcher connects all components with queues. The *Control* provides the user interface for the framework – either graphical for stand-alone applications or via network (UDP) for the integration into other software.

4.3 Data Flow

xAffect uses the ideas of the Unisens 2.0 data format to exchange data between components. Unisens [7] is a generic data format for multi sensor data. It defines a human readable meta data format in XML that acts as a container for sensor data and annotations from various recording systems. Unisens 2.0 supports evenly sampled signals from different sensors with different sampling rates as well as discrete events like a QRS annotation for ECG data sets and unevenly sampled time discrete measurement values. Therefore, Unisens can be easily extended to new data formats and allows a rapid prototyping with different data sources and formats.

All captured and processed data can be stored in Unisens format. This simplifies later debugging and offline analysis of developed systems supported by the extensive Unisens framework.

4.4 Network Communication

Distributed processing is a central component of xAffect. Specialized data sources and data sinks can interlink multiple xAffect instances. Two modes of communication are available: a high bandwidth connection between two instances based on UDP and a low bandwidth publish subscribe mechanism based on the eXtensible Messaging and Presence Protocol (XMPP). XMPP is an IETF standard that mainly aims at instant messaging. However, it provides a widespread robust infrastructure to transmit messages to multiple receivers.

5 Prototyping with xAffect

Due to its modular architecture the xAffect framework can easily be integrated into psychophysiological studies. The customization of xAffect is limited to the following steps:

1. Make sure that all required *Components* for signal generation, sensor integration, signal processing etc. are available. Missing components e. g. for the integration of new sensors or for new signal processing algorithms have to be implemented by extending an existing abstract class.

2. Generate a new *Setup* for the specific use case by defining the order and configuration parameters of all required components.

Currently components exist for data acquisition covering electrodermal activity, cardiac activity, activity monitoring and mouse button press as well as signal generators and a Unisens data reader. Accordingly, components for feature computation from these signals have been integrated, as well as components for data logging in Unisens data format and for data visualization. So far, the xAffect framework has been integrated in two scenarios where biofeedback from physiological sensors was required.

In our study about financial decision making, the xAffect framework has been used in order to connect different sensors to serious games. Goal of the study was developing a game to train a person’s emotion regulation capabilities using biofeedback. For this purpose various ECG sensors had to be evaluated for suitability for the game. Moreover, different kinds of games with different game concepts (e. g. [6]) were developed and connected to xAffect using the UDP/IP interface. Due to the modular architecture of the xAffect framework, it was easy to test several combinations of sensors and games. Based on the raw ECG signal from the sensors, heart beats were detected and heart rate computed. Using this data, an arousal value was computed to be fed back into the game (see Fig. 4 left). The games reacted to the changes of the arousal level by adapting the difficulty.

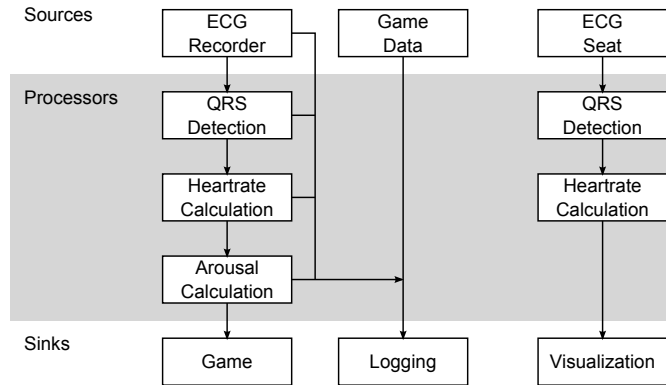


Fig. 4. Data flow for two different setups

Another context where the xAffect framework has successfully been used is in a driving scenario [13]. Knowledge about the driver’s cognitive state can help to develop assistance systems to increase road safety. For this purpose capacitive ECG electrodes were integrated into a car seat. Using the xAffect framework, ECG data from the car seat was used to calculate and display the current heart rate while a person is driving the car (see Fig. 4 right). In the future the system

will be extended by more physiological measures such as electrodermal activity in order to provide better feedback on the affective state of the driver.

6 Conclusion and Future Work

The xAffect framework offers a flexible way to integrate physiological sensors into online biofeedback scenarios. One of the main benefits of the xAffect framework is that the system can be configured for very complex scenarios. The integration effort of a new component is limited to writing an adapter for this component and to create or update the corresponding setup. Due to the modular architecture of the software, no changes regarding the core of the software will be necessary. Moreover, the modular architecture provides interfaces for easy integration of additional components such as new algorithms or additional sensors. The xAffect framework including Java source code, examples and documentation is available on www.xaffect.org under the original BSD license.

Acknowledgements

The research was carried out and funded as part of the xDelia research project (www.xdelia.org). We gratefully acknowledge funding from the European Commission under the 7th Framework Program, Grant No. 231830.

References

1. Bouchet, J., Nigay, L., Ganille, T.: Icare software components for rapidly developing multimodal interfaces. In: Proceedings of the 6th international conference on Multimodal interfaces. pp. 251–258. ICMI '04, ACM, New York, NY, USA (2004)
2. Cacioppo, J.T., Berntson, G.G., Larsen, J.T., Poehlmann, K.M., Ito, T.A.: The psychophysiology of emotion, vol. 2, chap. 11, pp. 173–191. The Guilford Press (2000)
3. DMello, S., Jackson, T., Craig, S., Morgan, B., Chipman, P., White, H., Person, N., Kort, B., el Kaliouby, R., Picard, R., Graesser, A.: Autotutor detects and responds to learners affective and cognitive states. In: Workshop on Emotional and Cognitive Issues at the International Conference of Intelligent Tutoring Systems (2008)
4. Dragicevic, P., Fekete, J.: Input device selection and interaction configuration with icon. *People and Computers* pp. 543–448 (2001)
5. Dreisbach, G., Goschke, T.: How positive affect modulates cognitive control: reduced perseveration at the cost of increased distractibility. *Journal of experimental psychology Learning memory and cognition* 30(2), 343–53 (2004)
6. Jerčić, P., Astor, P.J., Adam, M.T., Hilborn, O., Schaaff, K., Lindley, C., Sennertsen, C., Eriksson, J.: A serious game using physiological interfaces for emotion regulation training in the context of financial decision-making. ECIS 2012 (2012)
7. Kirst, M., Ottenbacher, J.: Unisens – a universal data format (2008), <http://www.unisens.org>, <http://www.unisens.org>
8. Lawson, J.Y.L., Vanderdonckt, J., Macq, B.: Openinterface: A lightweight open source platform for rapid prototyping of multimodal applications. In: Proc. of 1st Int. Workshop on User Interface Extensible Markup Language UsiXML2010 (2010)

9. Lo, A.W., Repin, D.V., Steenbarger, B.N.: Fear and greed in financial markets: A clinical study of day-traders. NBER Working Papers 11243, National Bureau of Economic Research, Inc (2005)
10. Loewenstein, G., Lerner, J.S.: The role of affect in decision making. In: Davidson, R.J., Goldsmith, H.H., Scherer, K.R. (eds.) *Handbook of Affective Science*, chap. 31, pp. 619–642. Series in Affective Science, Oxford University Press, Oxford, New York (2003)
11. Picard, R.: *Affective computing*. Tech. Rep. 321, MIT Media Laboratory, Perceptual Computing Section (November 1995)
12. Schalk, G., McFarland, D.J., Hinterberger, T., Birbaumer, N., Wolpaw, J.R.: BCI2000: a general-purpose brain-computer interface (BCI) system. *Biomedical Engineering, IEEE Transactions on* 51(6), 1034–1043 (Jun 2004)
13. Schneider, J., Koellner, C., Heuer, S.: An approach to automotive ECG measurement validation using a car-integrated test framework. accepted for publication at 2012 IEEE Intelligent Vehicles Symposium, Alcalá de Henares, Spain (2012)
14. Sinha, A.K., Landay, J.A.: Capturing user tests in a multimodal, multidevice informal prototyping tool. In: *Proceedings of the 5th international conference on Multimodal interfaces*. pp. 117–124. ICMI '03, ACM, New York, NY, USA (2003)